

Ozone Checker

Inexpensive Ozone Checker

The OG-3 uses a precision quartz UV lamp ozone generator. It is used to verify that ozone monitors respond to ozone levels.



Features

- generates approximately 0.1 PPM ozone concentration
- inexpensive ozone generation
- easily adapts to the A-21ZX, EZ-1X, C-30ZX & OS-1X
- AC adapter included

Product ID: **OG-3**


In Stock: **Yes**

Lead Time: **4 days**

Specifications

Ozone Source:	precision quartz UV lamp
Output Ozone Concentration:	0.1 ppm (standard) or 1 ppm (upon request)
Accuracy:	+/- 10%
Warm-up time:	30 minutes
Temperature of use:	Indoor room temperature (50-80 deg F)
Warranty:	One year
Power requirement:	12 VDC at 300 mA
Size:	36 x 95 x 160 mm (1.41 x 3.75 x 6.30 in)
Weight:	255 grams (9 oz)

OG-3 Setup

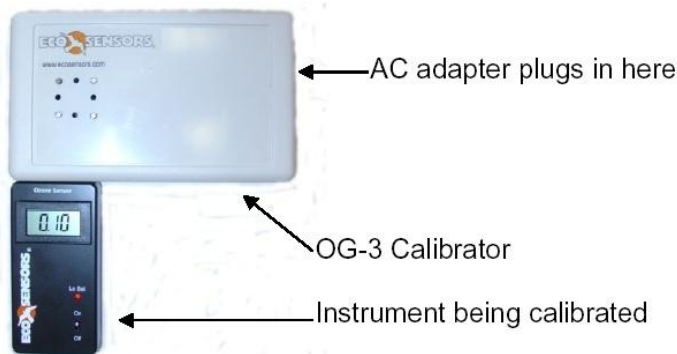

The OG-3 can easily check all the sensors in the Ecosensors product line. No other complicated equipment required!